


SYSTEM SOLUTION

S-Pack 01

EXCELLENCE IN COMPONENTS

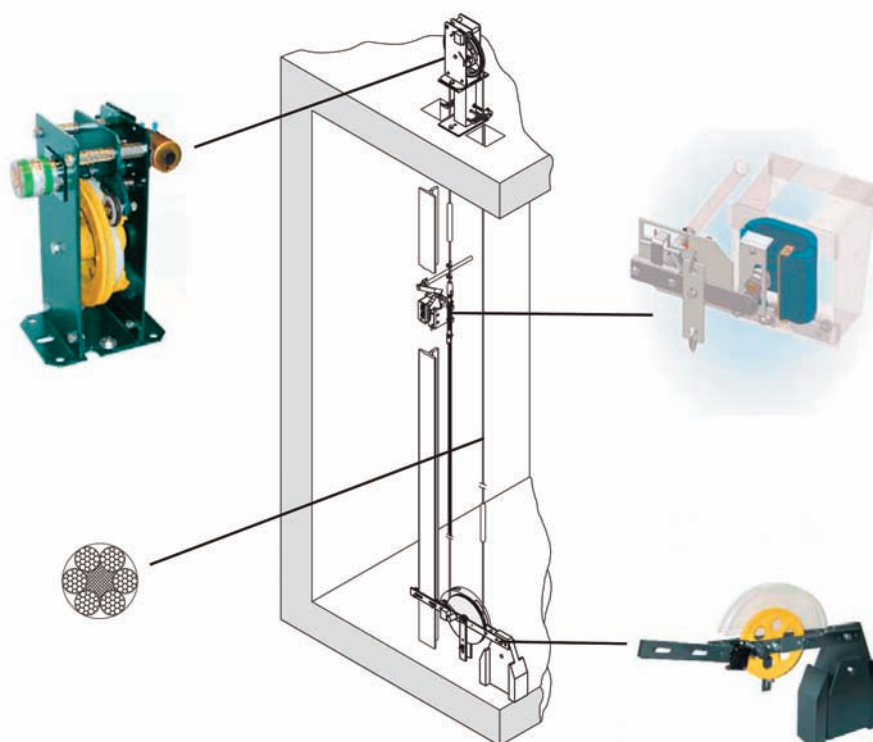

COMPLETE SOLUTIONS WITH PERFECT HARMONY

BI-DIRECTIONAL SAFETY GEAR + OVERSPEED GOVERNOR + TENSION WEIGHT + ROPE

SYSTEM SOLUTION

S-Pack 01

Application Range

max. rated speed (v_{nom})	1,88 m/s
max. tripping speed (v_t)	2,16 m/s
max. load (P+Q)	2500 kg
max. rated load (Q)	1100 kg
width of rail head (k)	8 - 16 mm
min. width of rail running surface (n)	22 mm
type of production of rail	drawn / machined
type of lubrication	dry / lubricated

FEATURES

- Compliance with the requirements as per LD 95/16/EC (EN 81)
- Solution for risk # 25, 26, 30, 31, 32, 34, 38, 39, 40, 42, 43, 44, 45, 50, 73 of EN 81-80 standard (SNEL)
- Integrated components: bi-directional overspeed governor LK-series, bi-directional safety gear BSG-25P, tension weight and overspeed governor rope
- Standard speed available from stock (e.g. nominal speed 1,0 m/s and tripping speed 1,3 m/s)
- Plain installation
- Easy maintenance